



SERVICE LETTER

No. 793

Piper Aircraft Corporation

Lock Haven, Pennsylvania, U.S.A.

"DOA SO-1 Approved"

January 6, 1977

S/M

Subject:

Flap Warning Placard

Models Affected:

Serial Numbers Affected:

PA-28-140 Cherokee.....	28-20001 to 28-7725126 Inclusive
PA-28-150 Cherokee.....	28-1 to 28-4377 Inclusive
PA-28-151 Cherokee Warrior.....	28-7415001 to 28-7715295 Inclusive
PA-28-160 Cherokee.....	28-1 to 28-4377 Inclusive
PA-28-180 Cherokee.....	28-671 to 28-7505259 Inclusive
PA-28R-180 Cherokee Arrow.....	28R-30001 to 28R-7130013 Inclusive
PA-28-181 Cherokee.....	28-7690001 to 28-7790273 Inclusive
PA-28R-200 Cherokee Arrow II.....	28R-35001 to 28R-7735498 Inclusive
PA-28R-201 Cherokee Arrow III.....	28R-7737001 to 28R-7737002 Inclusive
PA-28R-201T Cherokee Arrow T.....	28R-7703001 to 28R-7703008 Inclusive
PA-28-235 Cherokee.....	28-10001 to 28-7510135 Inclusive
PA-32-260 Cherokee Six.....	32-1 to 32-7700008 Inclusive
PA-32-300 Cherokee Six.....	32-40001 to 32-7740028 Inclusive
PA-32S-300 Cherokee Six.....	32S-40566 to 32S-7240147 Inclusive
PA-32R-300 Cherokee Lance.....	32R-7680001 to 32R-7780121 Inclusive
PA-34-200 Seneca.....	34-7250001 to 34-7450220 Inclusive
PA-34-200T Seneca II.....	34-7570001 to 34-7770097 Inclusive

Compliance Time:

At Owner/Operator's discretion.

Purpose: Reports from the field indicate the need of a placard that will warn persons boarding or deplaning any of the above affected aircraft of the flaps being partially extended or unlocked.

This Service Letter announces the availability of the above referenced placard that, when installed, will warn people of this condition.

Instructions: Apply placard per attached instructions data.

Material Required: One (1) each per aircraft, Piper Part Number 35664-02 Warning Placard @ suggested unit list price \$.65C.

Availability of Parts:



Your Piper Field Service Facility.

Effectivity Date:

This Service Letter is effective upon receipt.

Summary: Please contact your Piper Service Facility to make arrangements for compliance with this Product Refinement feature.

2750

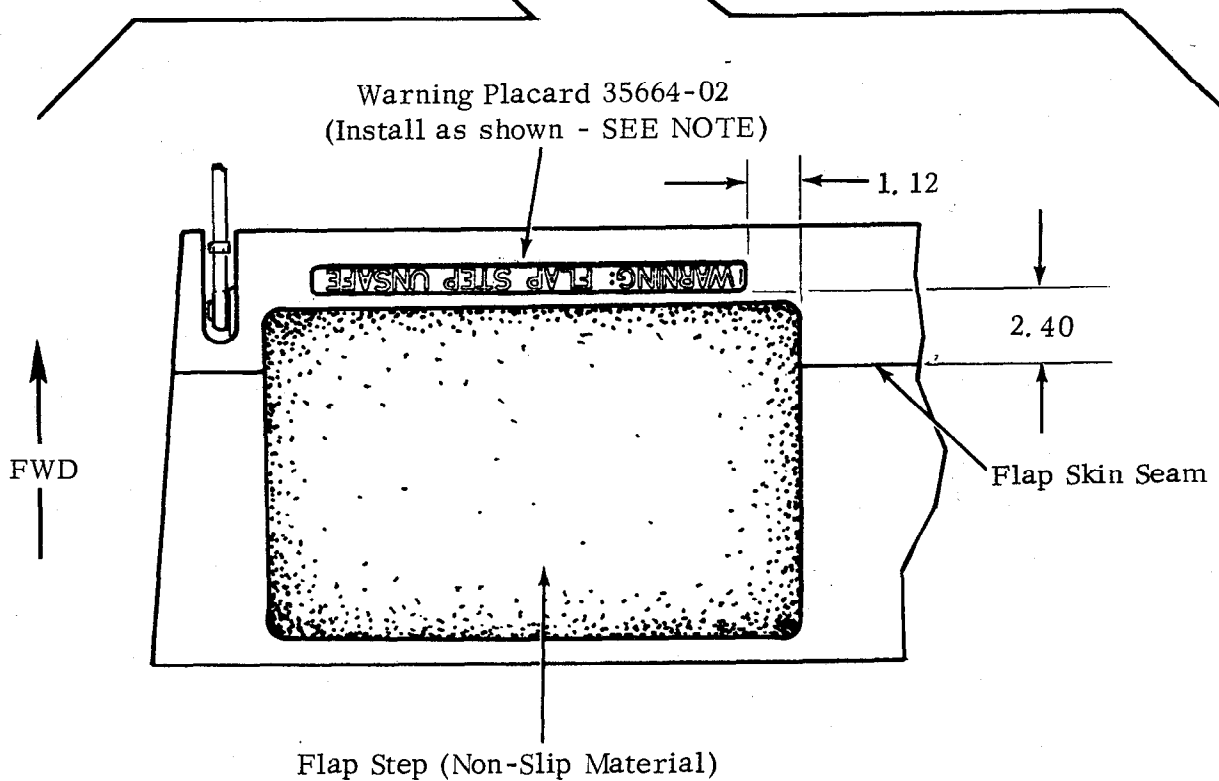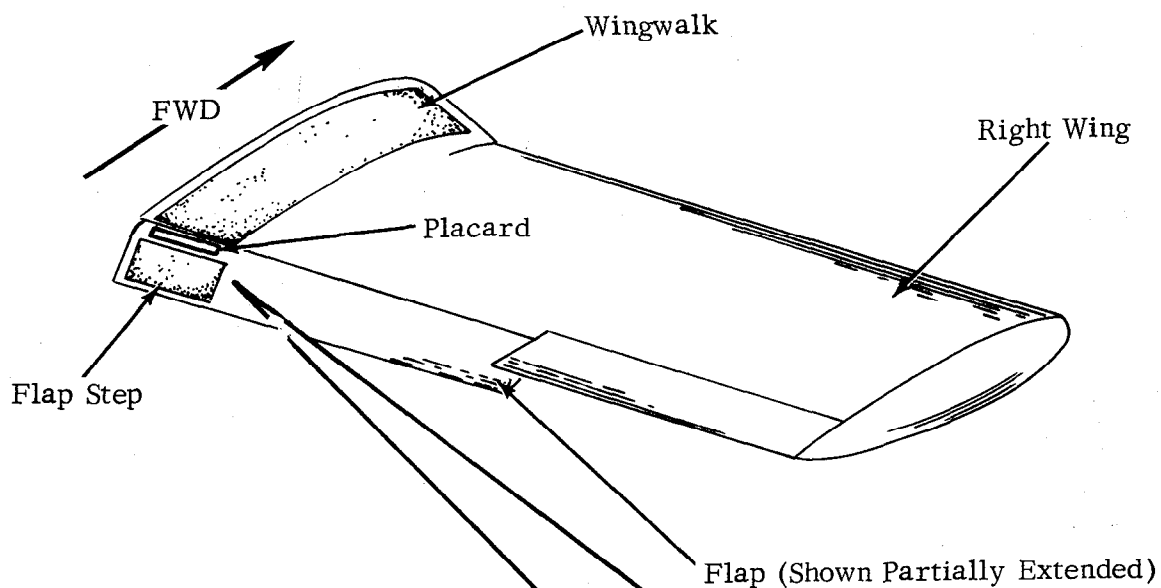

NOTE: If required, it is permissible to trim forward edge of flap step material in order to install the placard at the dimensions shown. Seal trimmed edge with 3M Edge Sealing Compound #62-5569-2660-8 (5 oz. Tube - Piper P/N 914 055).